
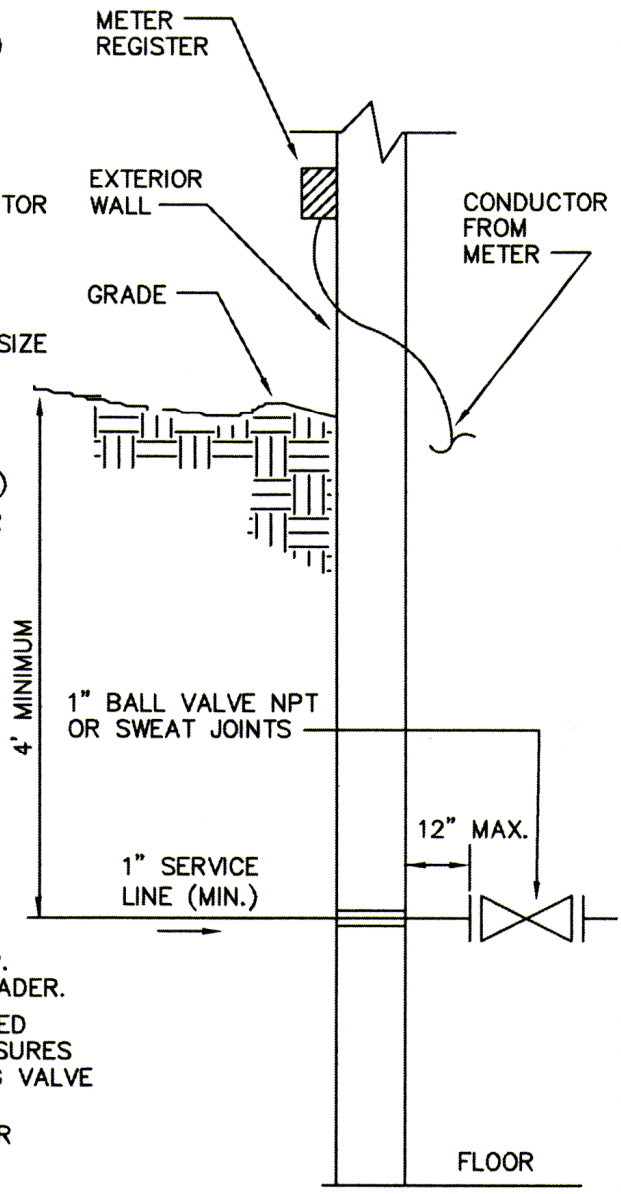


****Please note**:**
The irrigation line should be cut in before the domestic meter

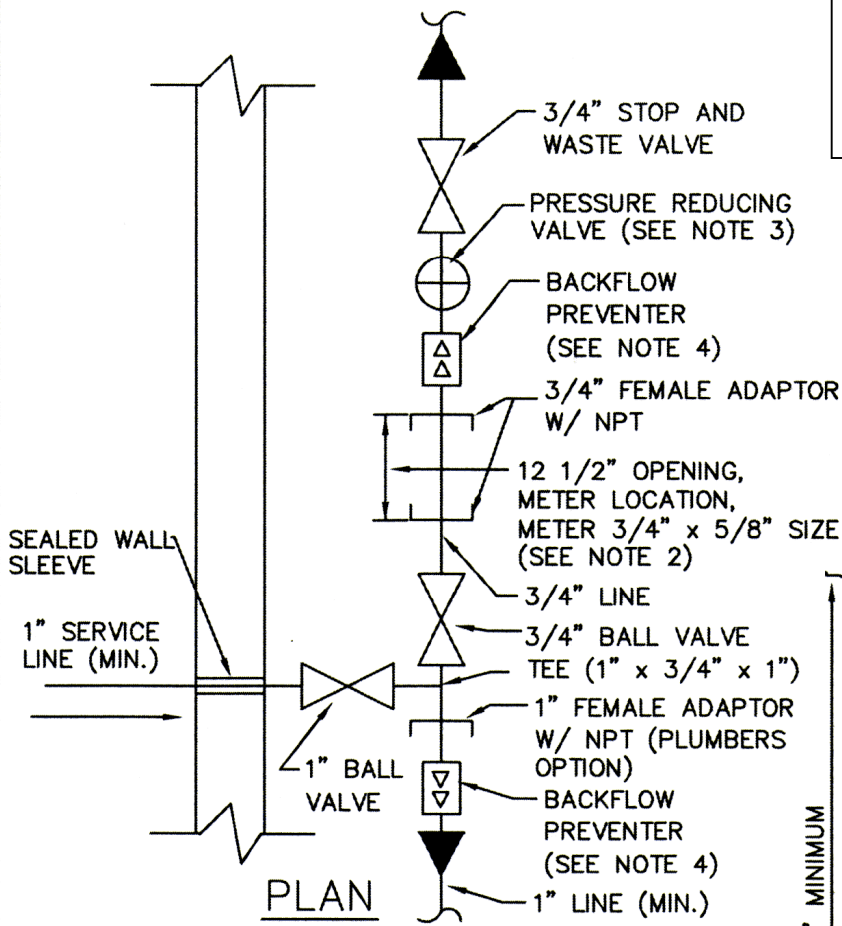

NOTES :

1. NOTIFY TOWNSHIP AT 343-1800 WHEN WATER SERVICE IS READY FOR INSPECTION & TESTING. DO NOT BACKFILL TRENCH UNTIL INSPECTION IS COMPLETED.
2. THE LOCATION OF THE METER AND REMOTE READER SHALL BE APPROVED BY THE TOWNSHIP. TOWNSHIP WILL INSTALL METER AND REMOTE READER.
3. PRESSURE REDUCING VALVES SHALL BE INSTALLED BY PLUMBER ON ALL SERVICES RECEIVING PRESSURES OF 65 P.S.I. OR GREATER. PRESSURE REDUCING VALVE SHALL BE WATTS U5B, OR EQUAL. SUBMIT MANUFACTURER'S CUT SHEET TO TOWNSHIP PRIOR TO INSTALLATION.
4. BACKFLOW PREVENTERS SHALL BE INSTALLED BY PLUMBER. BACKFLOW PREVENTER SHALL BE WATTS NO. 7, OR EQUAL. SUBMIT MANUFACTURER'S CUT SHEET TO TOWNSHIP PRIOR TO INSTALLATION.
5. SERVICE LINE SHALL BE MINIMUM 1" TYPE K SOFT COPPER CONFORMING TO ASTM SPECIFICATION B88. A CONTINUOUS RUN OF PIPE, FREE OF COUPLINGS, SHALL BE INSTALLED BETWEEN THE 1" BALL VALVE AND THE CURB STOP.

SECTION

WARRINGTON TOWNSHIP		
DSG. BY: KSC	CKD. BY: KEH	TYPICAL RESIDENTIAL METER AND SPRINKLER INSTALLATION
DATE: 4/92	SCALE: NONE	
REVISION	DATE	
B.F.	1-96	
B.F.	4-96	STANDARD DETAIL W6
M.K.	5-02	