



For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE 305.2.1(1)
HEIGHT OF BARRIER ABOVE GRADE

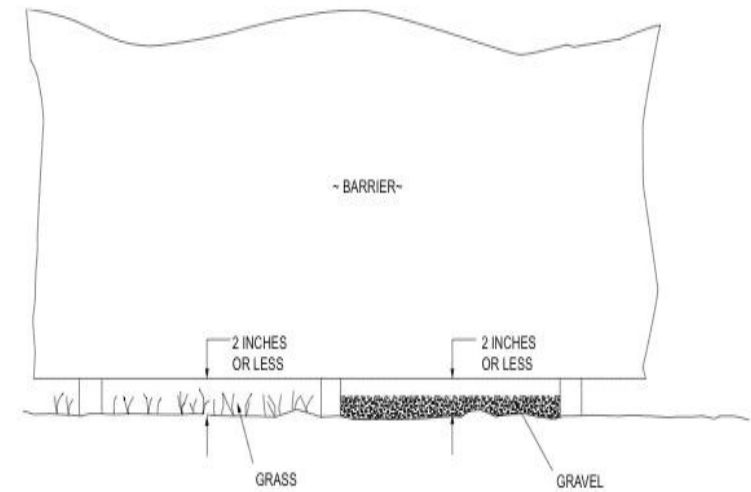

For SI: 1 inch = 25.4 mm.


FIGURE 305.2.1(2)
MAXIMUM CLEARANCE FROM BOTTOM OF BARRIER TO GRADE

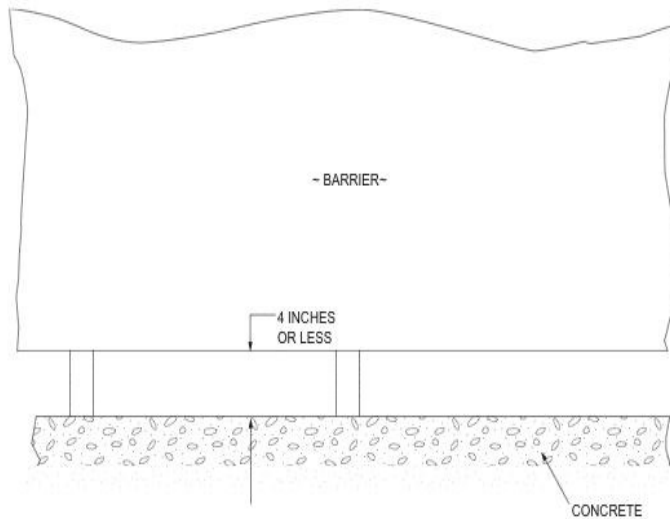

ELEVATION VIEW FROM OUTSIDE
OF BARRIER SURROUNDING THE POOL OR SPA

For SI: 1 inch = 25.4 mm.

FIGURE 305.2.1(3)
MAXIMUM CLEARANCE FROM BOTTOM OF BARRIER TO SOLID SURFACE

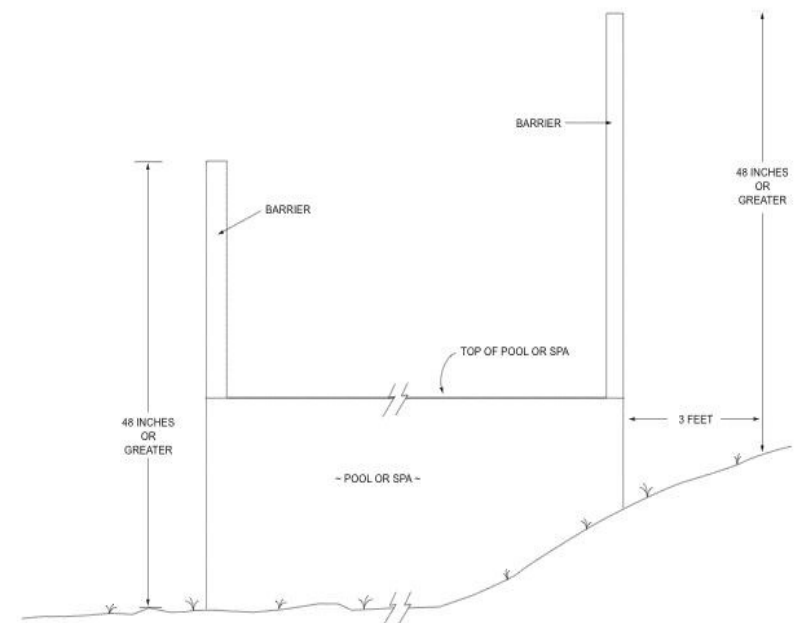

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE 305.2.1(4)
HEIGHT OF BARRIER WHERE MOUNTED ON TOP OF THE POOL OR SPA



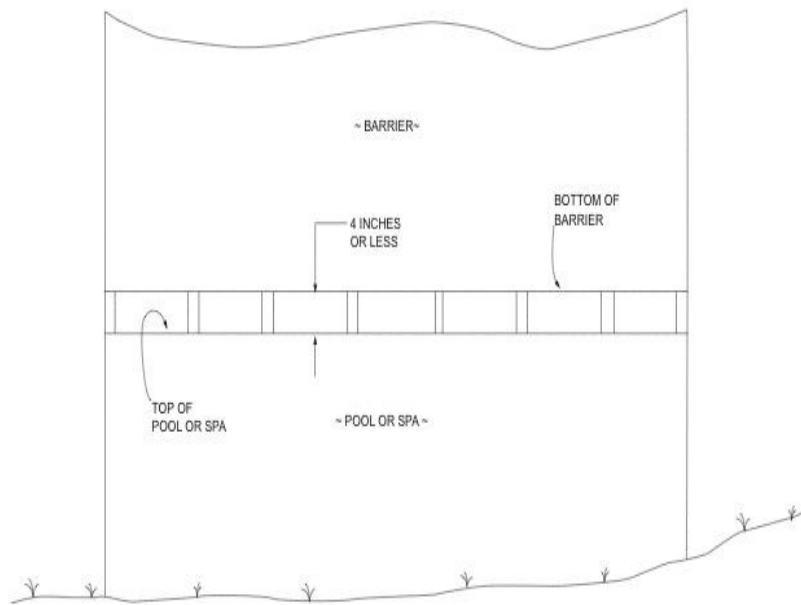


FIGURE 305.2.1(5)
MAXIMUM CLEARANCE FROM BOTTOM OF BARRIER TO TOP OF
THE POOL OR SPA WHERE BARRIER IS MOUNTED ON TOP OF THE POOL OR SPA

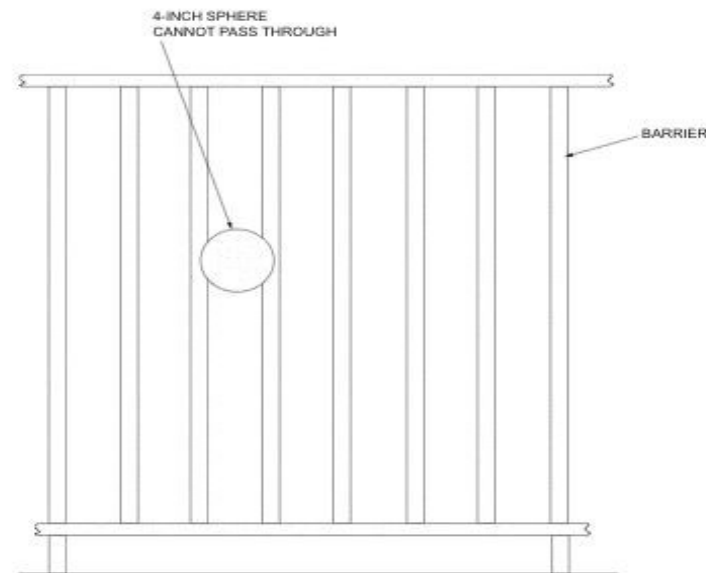


For SI: 1 inch = 25.4 mm.

FIGURE 305.2.2
FOUR-INCH SPHERE CANNOT
PASS THROUGH BARRIER OPENINGS

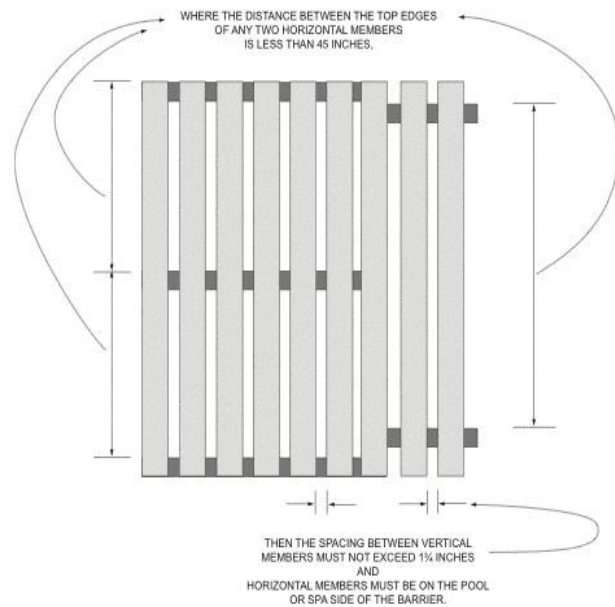




For SI: 1 inch = 25.4 mm.


FIGURE 305.2.5(1)
MAXIMUM SPACING BETWEEN VERTICAL MEMBERS WHERE
DISTANCE BETWEEN TOP OF HORIZONTAL MEMBERS IS LESS THAN 45 INCHES

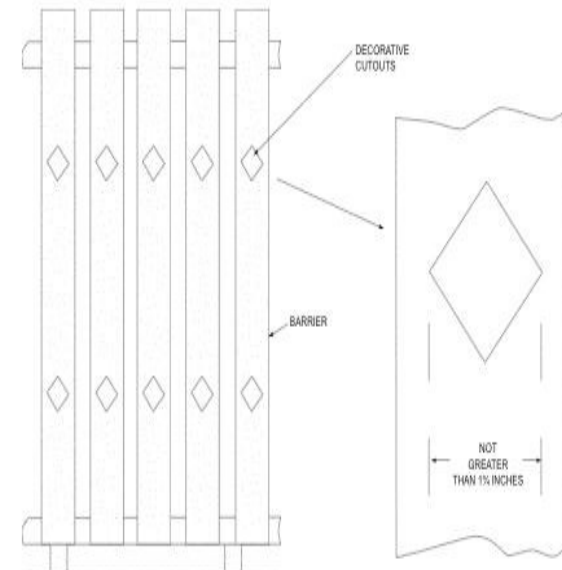

For SI: 1 inch = 25.4 mm.


FIGURE 305.2.5(2)
MAXIMUM OPENING WIDTH OF DECORATIVE CUTOUTS IN BARRIER MATERIALS

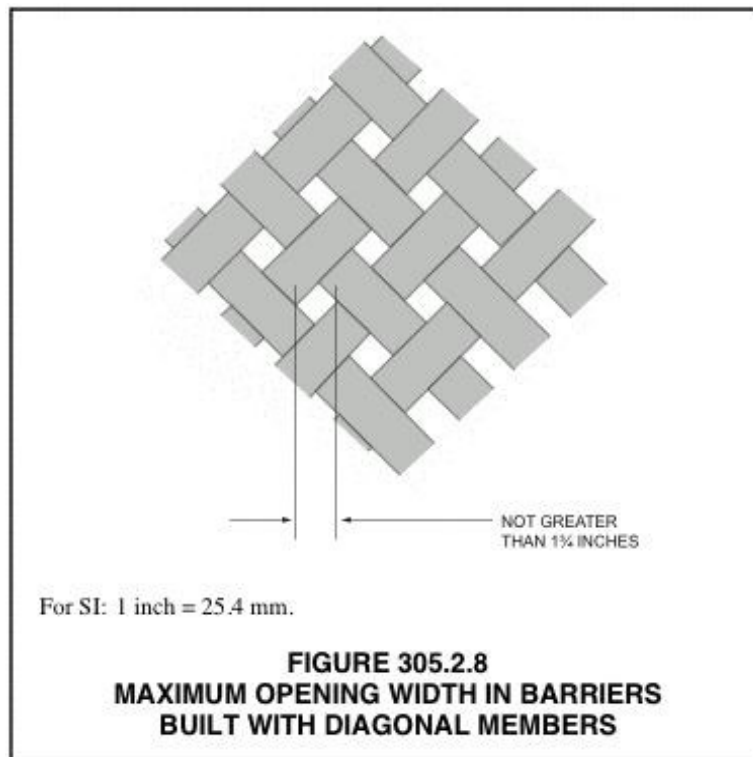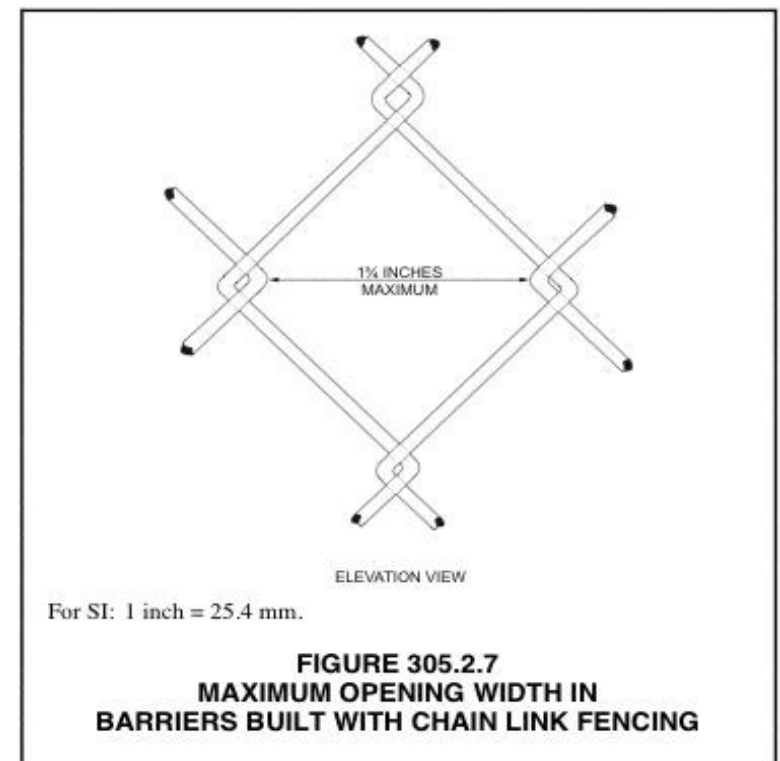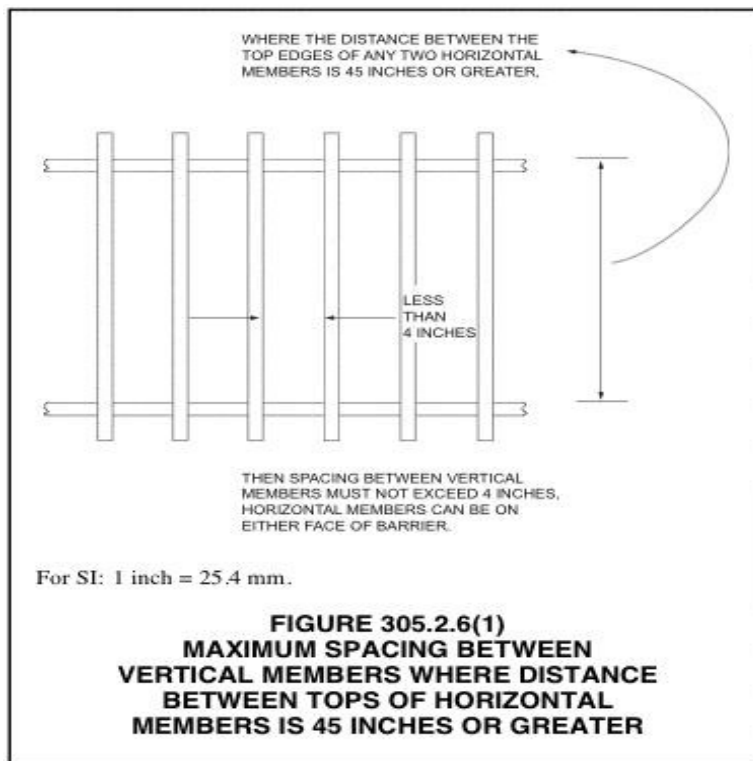

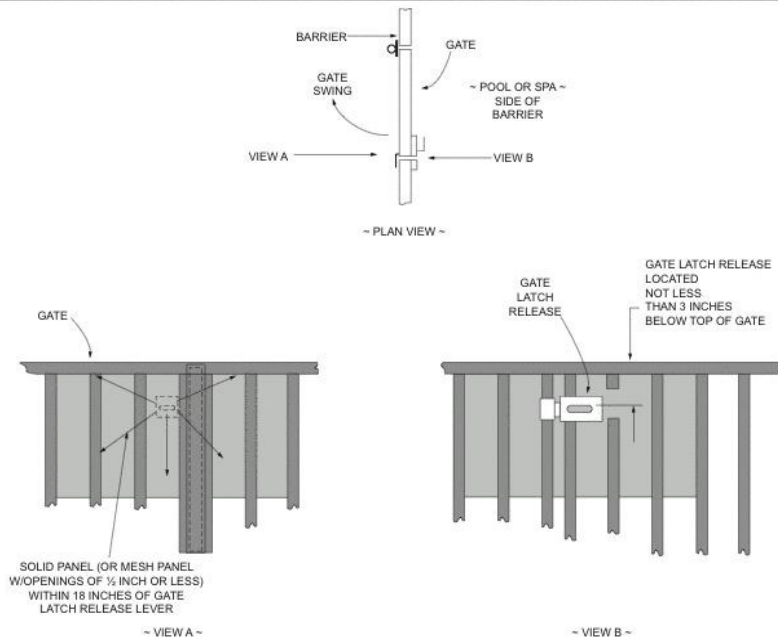


For SI: 1 inch = 25.4 mm.

FIGURE 305.3.3(1)
LOCATION AND PROTECTION OF BARRIER GATE LATCH
RELEASE WHERE LOCATED AT LESS THAN 54 INCHES ABOVE WALKING SURFACE

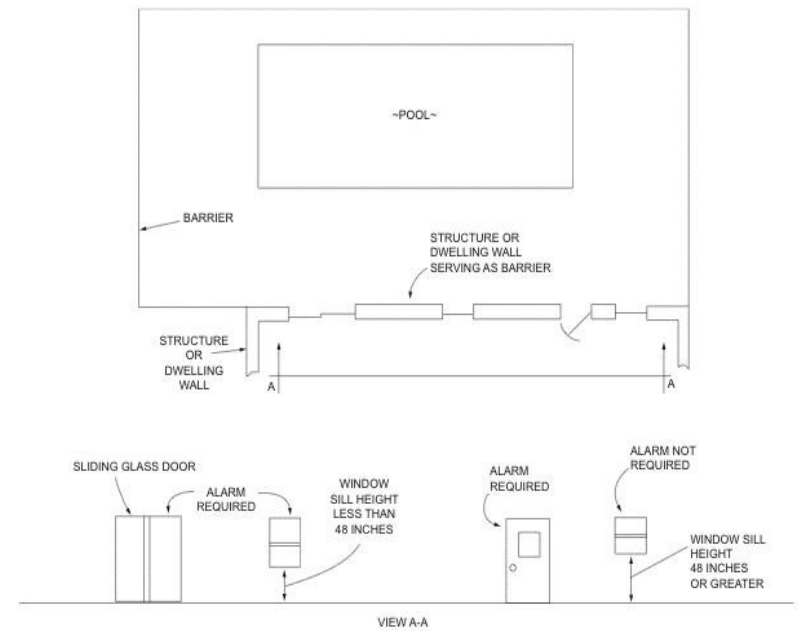

For SI: 1 inch = 25.4 mm.

FIGURE 305.4(1)
STRUCTURE OR DWELLING WALL SERVING AS A BARRIER TO A POOL OR SPA

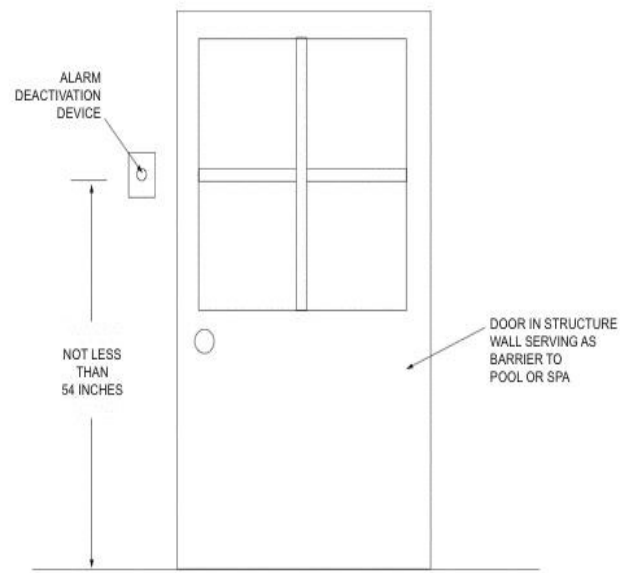

For SI: 1 inch = 25.4 mm.

FIGURE 305.4(2)
ALARM DEACTIVATION DEVICE LOCATION FOR OPENING IN
STRUCTURE OR DWELLING WALL SERVING AS BARRIER TO A POOL OR SPA