


2x6 LEDGER
WITH 1/2" DIA. CAIRRAGE BOLTS
@16" O.C. AND JOIST HANGERS AT HOUSE.

2x6 JOIST HANGERS AT
ALL JOISTS MEETING HOUSE
TYPICAL THROUGHOUT

(2)2x8 BEAM WITH
(2)1/2" THRU BOLTS @ EACH POST
AND FULL DEPTH BLOCKIG @24" O.C.

10" DIAMETER
CONCRETE
FOOTING

4x4 POST
18"x18"x16" DEEP 10" DIA.
CONCRETE PIER FOOTING
BELOW POST (typ.)
TYPICAL

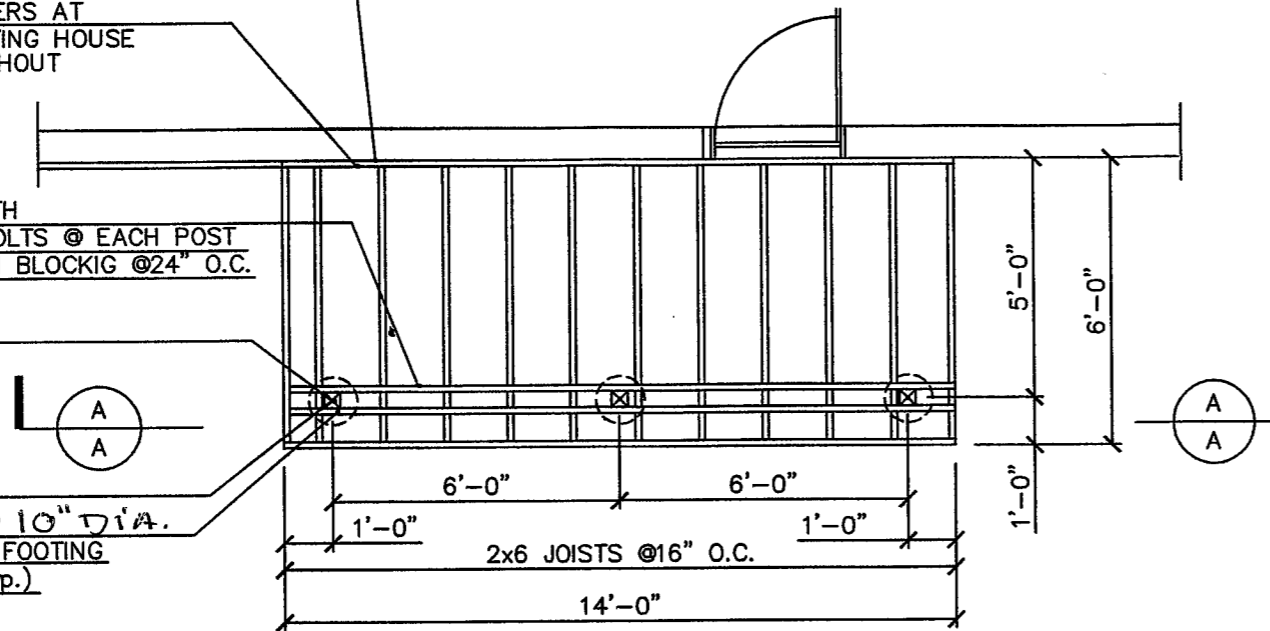


FOUNDATION & FRAMING PLAN

SCALE: 1/4" = 1'-0"

EXISTING HOUSE

OUTSIDE LIGHT

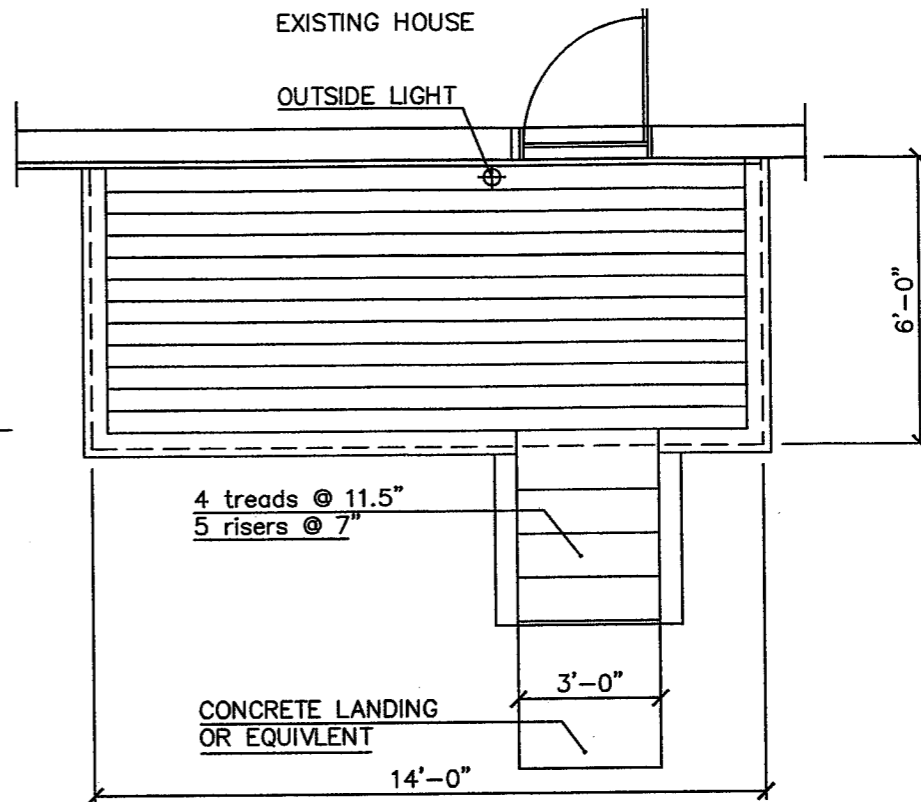

FLOOR PLAN

SCALE: 1/4" = 1'-0"

GUARDRAIL


2x6 JOISTS @ 16" O.C.

2-2X8 BEAM

SOLID BLOCKING @24" O.C.
(2) 1/2" DIA. CAIRRAGE BOLTS
AT EACH POST (typ.)

4x4 POSTS

10" DIAMETER
CONCRETE
FOOTING

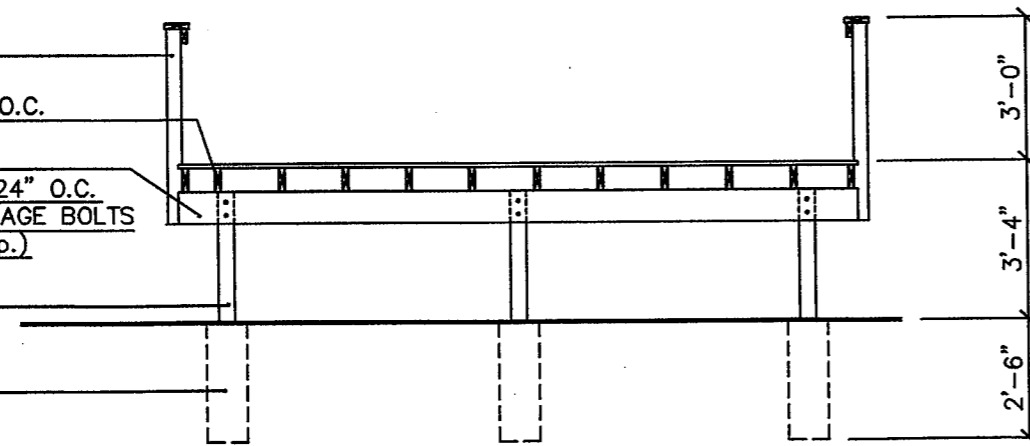

SECTION A-A

SCALE: 1/4" = 1'-0"

HY Tech Builders

Dave Peters (513) 884-4270

Bernard ave. Reading Ohio, 45215

PROPOSED PORCH

Sherry C Lusby

4209 Kugler Mill rd Cincinnati, Ohio 45236

DATE: 9/23/13

3

SHEET # 3 of 3