



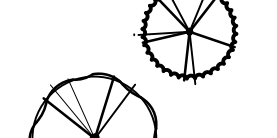





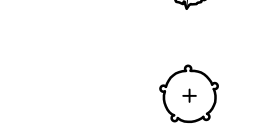
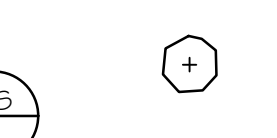



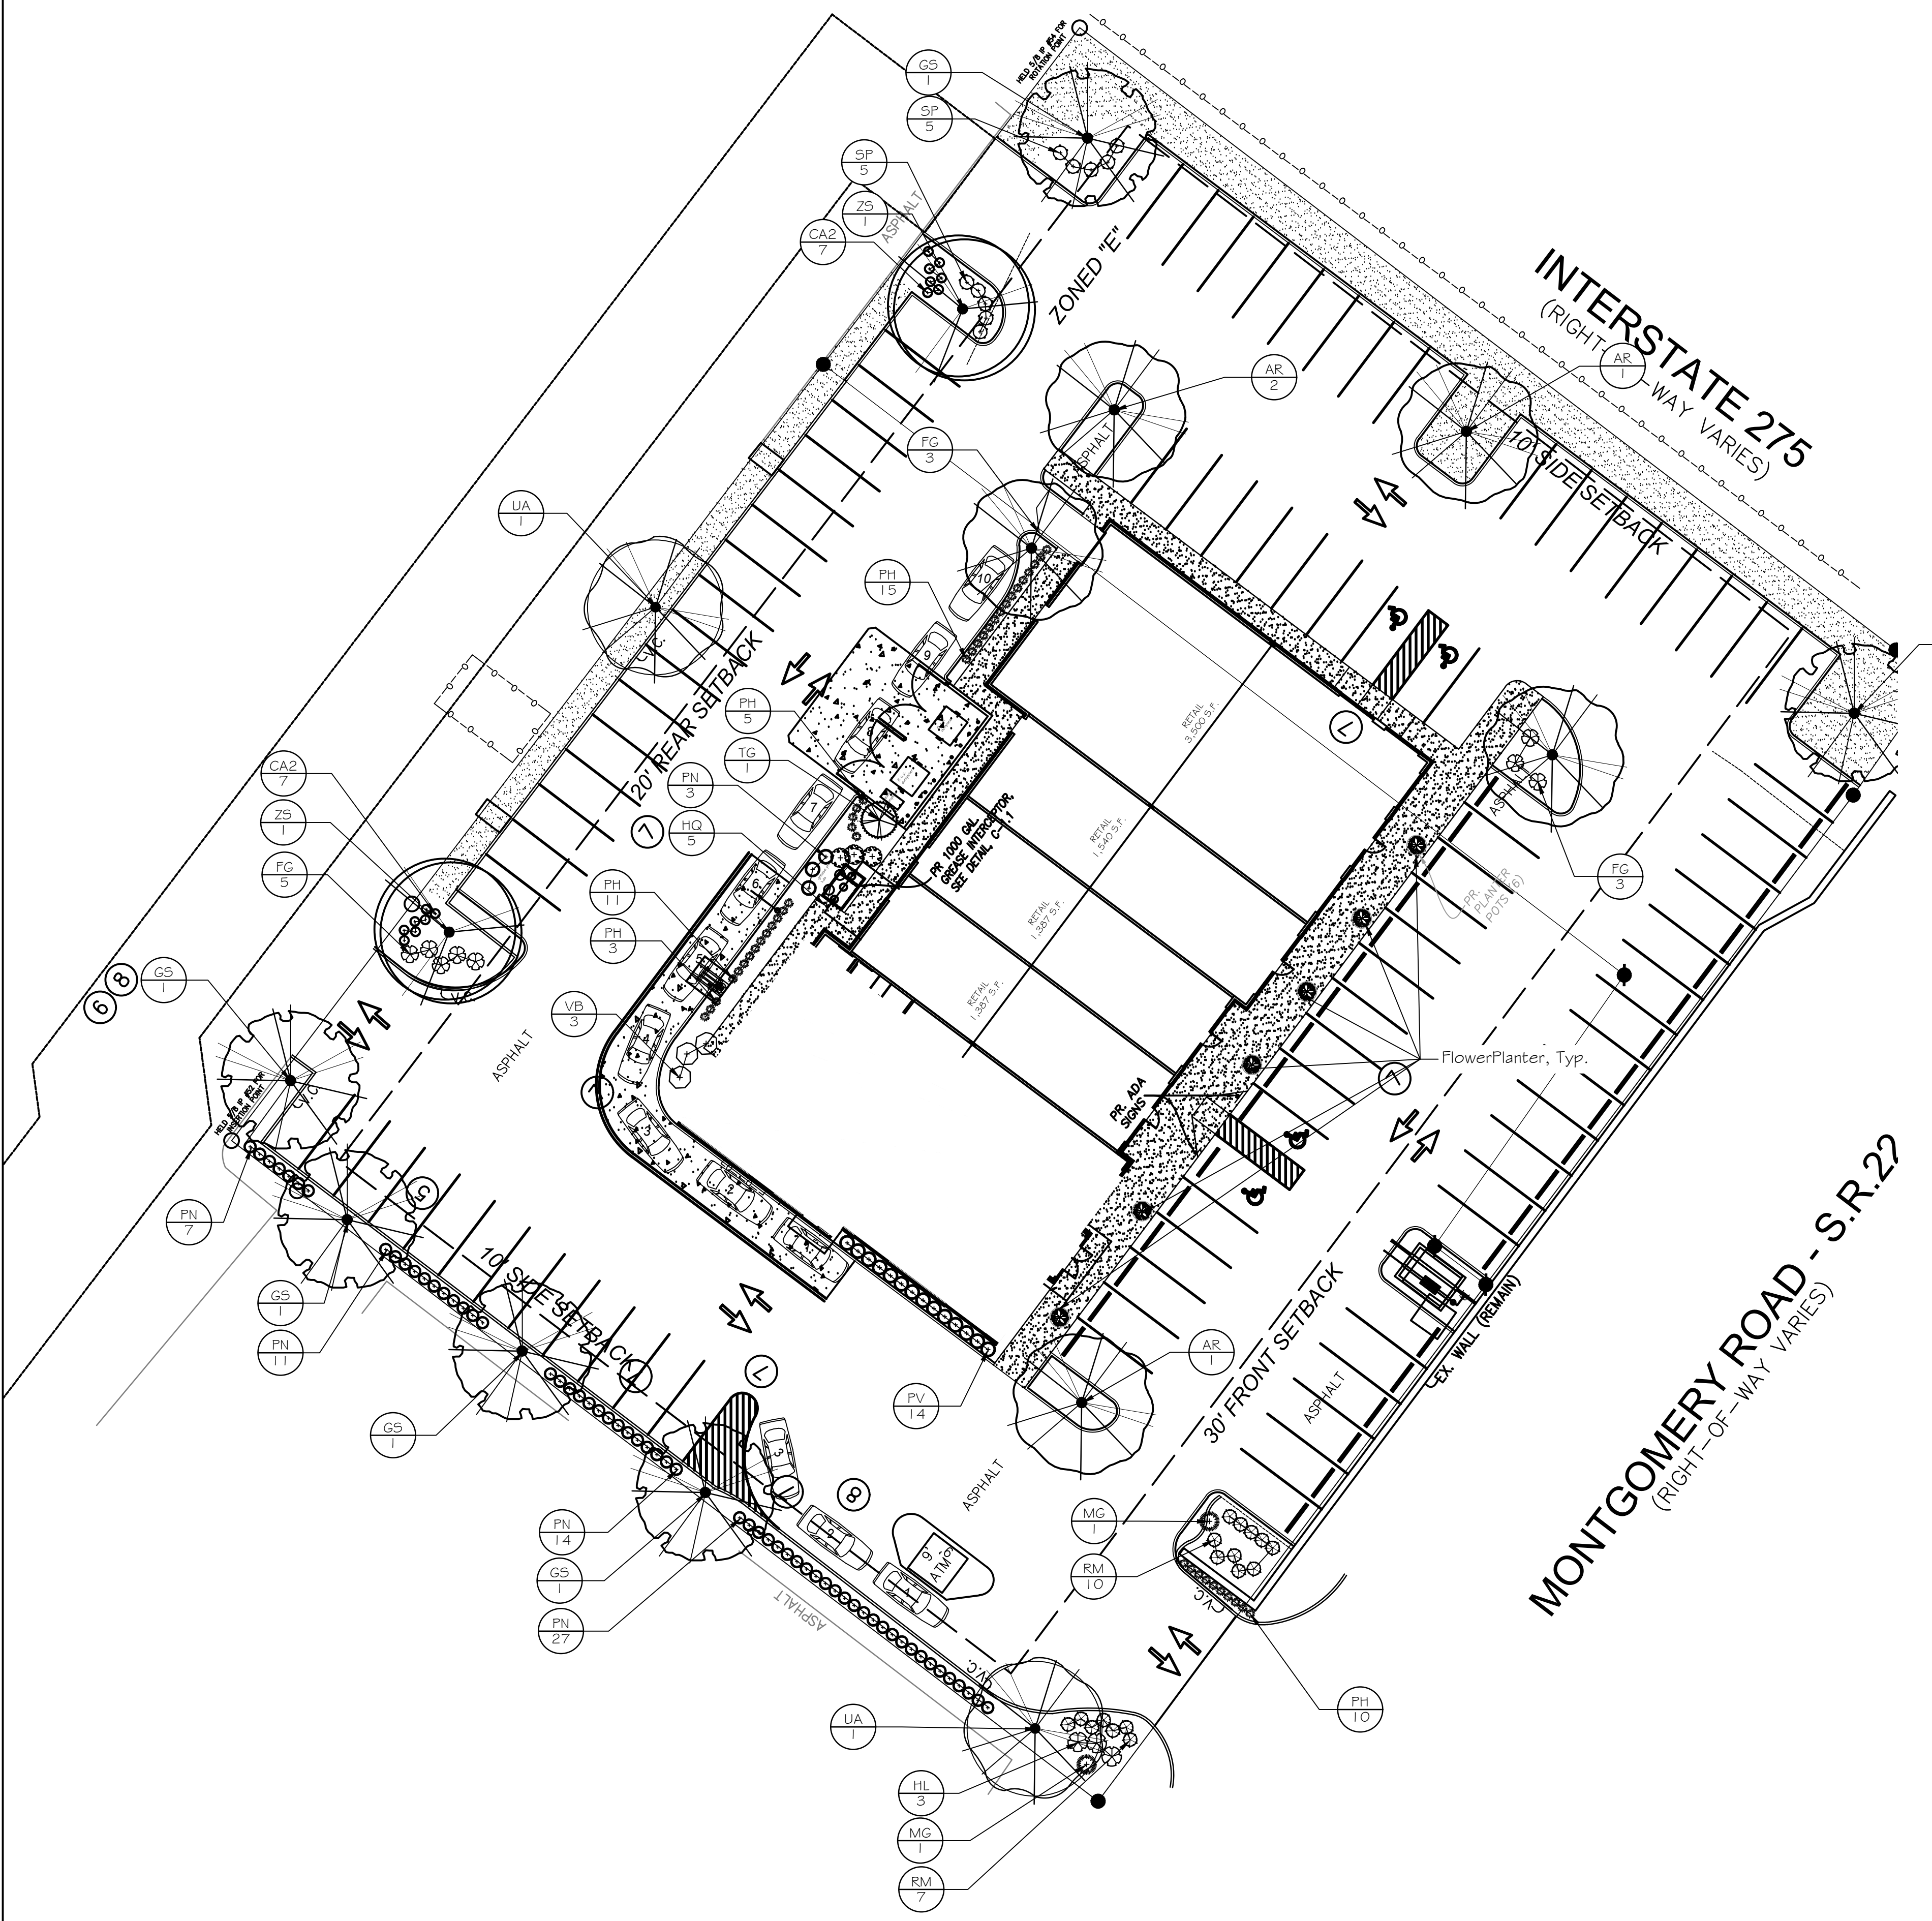


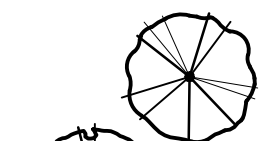



Date	Revisions
11/22/16	Rev. 1
1/23/17	Rev. 2
	
Designed By B. DRUFFEL	
Drawn By B. DRUFFEL	
Checked By B. DRUFFEL	
Date	NOV. 1, 2016
Scale	1" = 10'-0"
Sheet	1 of 1



PLANT SCHEDULE

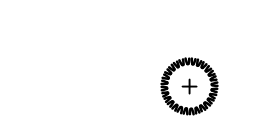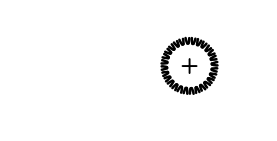TREES	CODE	QTY	BOTANICAL NAME / COMMON NAME	CONT	CAL
	AR	5	Acer rubrum 'Frank Jr.' / Redpoint Maple	B & B	2.5" Cal
	GS	6	Gleditsia triacanthos 'Skyline' / Skyline Honey Locust	B & B	2.5" Cal
	TG	1	Thuja occidentalis 'Green Giant' / Green Giant Arborvitae	B & B	
	UA	2	Ulmus x 'Allee' / Allee Elm	B & B	2.5" Cal
	ZS	2	Zelkova serrata 'Green Vase' / Green Vase Zelkova	B & B	2.5" Cal
SHRUBS	CODE	QTY	BOTANICAL NAME / COMMON NAME	CONT	SIZE
	FG	8	Fothergilla gardenii / Dwarf Fothergilla	B & B	24-30"
	HL	3	Hydrangea paniculata 'Little Lime' / Little Lime Hydrangea	3 gal	
	HQ	3	Hydrangea quercifolia / Oakleaf Hydrangea	3 gal	
	RM	17	Rosa x 'Meijocosa' / Pink Drift Rose	3 gal	
	SP	10	Spiraea japonica 'Little Princess' / Little Princess Japanese Spirea	3 gal	
	VB	3	Viburnum x burkwoodii / Burkwood Viburnum	B & B	3-4'
GRASSES	CODE	QTY	BOTANICAL NAME / COMMON NAME	CONT	SIZE
	CA2	14	Calamagrostis x acutiflora 'Karl Foerster' / Feather Reed Grass	3 gal	
	MG	2	Miscanthus sinensis 'Gracillimus' / Maiden Grass	3 gal	
	FN	62	Panicum virgatum 'North Wind' / Northwind Switch Grass	2 gal	
	FV	14	Panicum virgatum 'Shenandoah' / Shenandoah Switch Grass	2 gal	
	PH	44	Pennisetum alopecuroides 'Hameln' / Hameln Dwarf Fountain Grass	2 gal	
SOD/SEED	CODE	QTY	BOTANICAL NAME / COMMON NAME	CONT	SIZE
	TU	890 sf	Turf / Turf - seed	seed	
	TF	2,633 sf	Turf - Fescue / Turf - sod	sod	

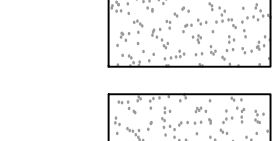NOTES:

- The site shall be cleared of all construction debris, and the planting beds shall be prepped with topsoil and organic medium to a minimum depth of 18 inches. (To be performed by general contractor prior to landscape contractor's arrival)
- All beds will have any over poured concrete removed prior to landscape contractor's arrival.
- Beds to be incorporated with peat moss and organic matter to a depth of 3 inches prior to planting.
- All plant material shall be subject to approval or rejection by the Landscape Architect or Owner prior to installation. Installed and then rejected material shall be replaced by the contractor at his/her expense.
- All plant material to be nursery grown in similar climate. All plant material shall be vigorous and of normal habit of growth and shall be free of girdling roots, sun scald, abrasions, disease, insects, insect eggs and larvae. Plants shall equal or exceed the standards as outlined by the American Standards for Nursery Stock.
- All plantings to be installed with slow release plant tab fertilizer (20-5-10) and M-Roots per manufacturer's specification.
- All beds are to be mulched to a depth of 3 inches with dark hardwood mulch after planting is completed.
- All areas to be planted with turf are to be scarified prior to seeding. Starter fertilizer will be used.
- All seeded areas are to be covered with a layer of straw and watered prior to completion of landscape installation.
- All new plantings are to be watered by landscape contractor immediately after installation.
- Site is to be cleaned each day prior to crew leaving. Site will be kept free of debris and trash.

