


* LOCAL, RESIDENTIAL PUBLIC AND OFFICE INDUSTRIAL STREETS
 ** RESIDENTIAL SUBDIVISION STREETS

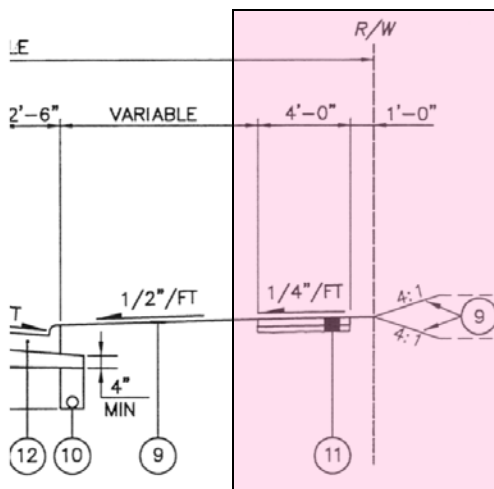


AIL B
TYPICAL HALF-SECTION
FOR SUBDIVISIONS

LEGEND

- ① ITEM 204 - SUBGRADE COMPACTION AND PROOF ROLLING ***
- ② ITEM 304 - 4" AGGREGATE BASE
- ③ ITEM 301 - 4" BITUMINOUS AGGREGATE BASE, PG64-22 + OR
 - 7" BITUMINOUS AGGREGATE BASE, PG64-22 (2-LIFTS) ++
- ④ ITEM 448 - 1 3/4" ASPHALT CONCRETE, INTERMEDIATE COURSE, TYPE 2, PG64-22
- ⑤ ITEM 407 - TACK COAT FOR INTERMEDIATE COURSE (0.06 GAL./S.Y.)
- ⑥ ITEM 448 - 1 1/4" ASPHALT CONCRETE, SURFACE COURSE, TYPE 1, PG64-22
- ⑦ ITEM 408 - PRIME COAT (0.40 GAL./S.Y.)
- ⑧ ITEM 609 - COMBINATION CURB AND GUTTER, TYPE 2
- ⑨ ITEM 659 - SEEDING AND MULCHING
- ⑩ ITEM 605 - 6" SHALLOW PIPE UNDERDRAIN, 707.41, WITH FABRIC WRAP
- ⑪ ITEM 608 - 4" CONCRETE WALK WITH 3"-304 AGGREGATE BASE
- ⑫ ITEM 609 - CURB, TYPE 3
- ⑬ ITEM 305 - 8" MIN. CONCRETE BASE
- ⑭ ITEM 407 - TACK COAT (0.075 GAL./S.Y.)
- ⑮ ITEM 448 - 2" MIN. ASPHALT CONCRETE, INTERMEDIATE COURSE, TYPE 2, PG64-22
- ⑯ ITEM 304 - 4" MIN. AGGREGATE BASE
- ⑰ ITEM 452 - 9" MIN. NON-REINFORCED CONCRETE PAVEMENT
- ⑱ ITEM 448 - 1 1/2" MIN. ASPHALT CONCRETE, SURFACE COURSE, TYPE 1, PG64-22

*** SOFT SUBGRADE SHALL BE REMOVED AND REPLACED WITH SUITABLE MATERIAL AND GEOTEXTILE FABRIC, AS DIRECTED BY THE ENGINEER. PAYMENT WILL BE BASED ON THE QUANTITIES OF ITEMS 204 USED.

+ LOCAL AND RESIDENTIAL PUBLIC STREETS
 ++ OFFICE INDUSTRIAL STREETS

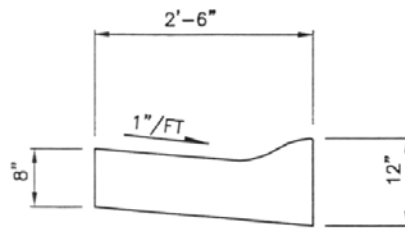

FOR ADDITIONAL DETAILS, SEE ODOT STANDARD CONSTRUCTION DRAWING BP-5.1.

ROLLED CURB DIMENSIONS

FIG 7.1.1